

T8 17.5W 4FT. GOLD BYP TITANIUM LED SERIES



PRO



BYPass

- ⌚ Provides protection against harmful UV light rays
- ⌚ Wide beam design: 310° light emitting area
- ⌚ Suitable for use in totally enclosed fixtures
- ⌚ End-to-end lighting with no dark spots
- ⌚ Frosted glass tube for increased light diffusion efficiency
- ⌚ Built-in universal voltage driver - Bypass installation

17.5W REPLACES



32W
Fluo.

60% Energy Savings

\$114 Savings
per fixture*



50,000 H




UNIVERSAL



NO UV LIGHT



WARRANTY



80
CRI (Ra)



ENCLOSED**




SUITABLE FOR CLEAN ROOM APPLICATIONS



T8 17.5W 4FT. GOLD BYP TITANIUM LED SERIES



BYPASS INSTALLATION

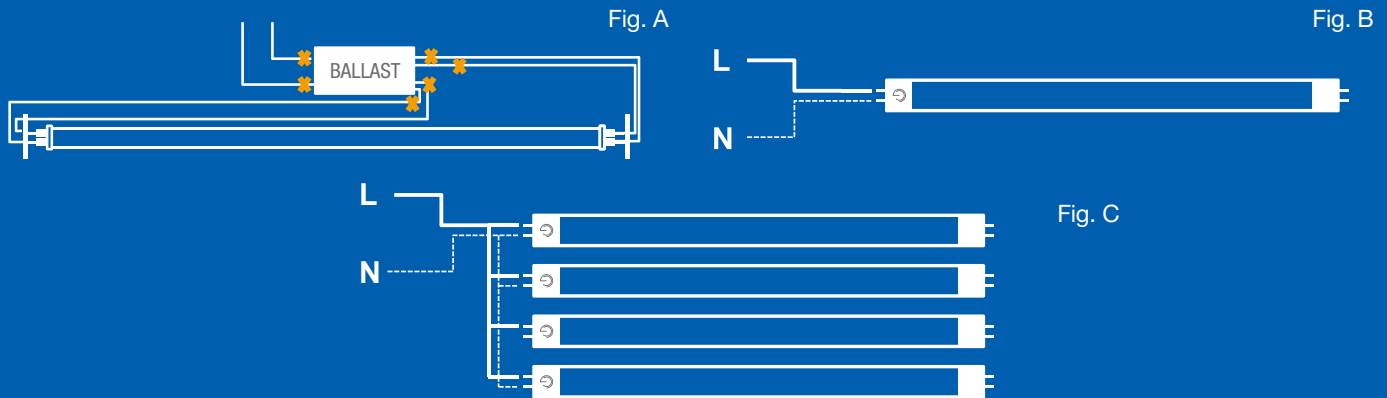

- Bypass ballast by cutting all wires as in Fig. A
- Directly wire Live + Neutral on a single end as in Fig. B for single tube or as in Fig. C for multiple tubes
- Replace shunted lamp holder with non-shunted one if applicable (Instant Start)
- Existing fixture maintains original UL compliance thanks to UL1598C tube

SPECIFICATIONS

Product Model	57840 17.5T8/4F/GOLD/BYP
Type	T8
Base	Medium Bi-Pin G13
Power (W)	17.5
Voltage - Frequency	120-277V 50-60Hz
Typical lumens (lm)	1100
Efficacy (LPW)	63
Light Emitting Area	310°
Beam Angle	160°
Dimmable	No
Power Factor	0.9
THD	<20%
Rated Lifetime - L70 (hrs.)	50,000
Dia. x MOL	1.14"x47.76" (29x1213mm)
Weight (lb. / g)	0.57lb. / 259g

* Savings per fixture based on \$0.11 / kw energy cost, 12 hrs / day lamp usage, 2x36W fixture / \$10 fluorescent tube, \$45 ballast with 15,000 hr lifetime, \$35 LED tube with 50,000 hr lifetime

** Suitable for use in totally enclosed fixtures

*** Suitable for damp locations. Not for use where directly exposed to the weather or water

**** Full installation guide and more details available on website